

STREET PRO SAWS



**Precision cutting performance
on Concrete and Asphalt**



The **SP1E16A** is a simple operating electric push flat saw that provides demolition sawing in environments where gasoline or diesel powered units cannot operate.

KEY FEATURES



Rugged reinforced steel frame construction eliminates flex for precise sawing operations

Standard garden hose water plumbing system

Simple, adjustable blade depth control with positive locking

Powerful BALDOR® 5HP 230V single phase electric motor with industrial ON/OFF switch box enclosure

16" blade capacity provides 5½" of cut depth

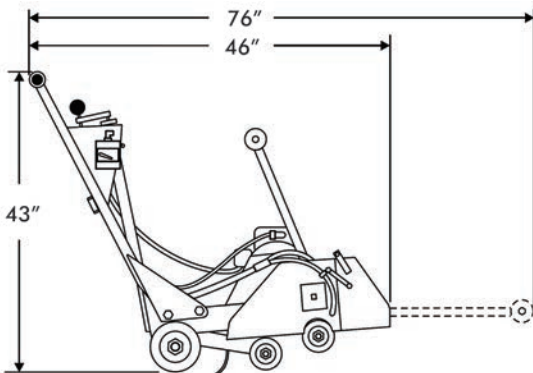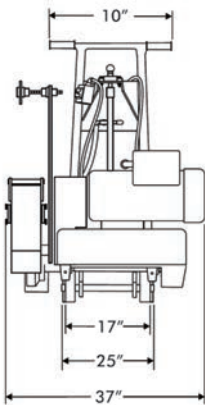

SP1E16A

- For demolition sawing of cured concrete and asphalt.
- **Reinforced steel frame will not flex or bend with usage.**
- Industrial blade shaft bearing assembly for long service life.
- **Trusted electric motor - NEMA Class F insulation rating.**
- Rugged front and rear wheels supported by bearings to provide accurate tracking.
- **Simple raise/lower Acme thread with positive depth lock.**
- Saws straight to the edge of walls and columns.
- **Depth of Cut: 5 1/2" with 16" blade.**
- Compact - 235 lbs.
- **Easy maintenance design.**



Specifications

Model	Power*	Arbor Size in. (mm)	Blade Capacity in. (mm)	Cutting Depth in. (mm)	Cutting Position	Front Wheels	Rear Wheels	Weight lbs. (kgs)
SP1 Series Saws - Push Models								
SP1G	HONDA GX200 Gasoline w/Cyclone Air Filtration	5/8" (15.9)	10" (254)	3 1/4" (83)	Center Mounted Blade	5" x 1.5"	5" x 1.5"	108 (48.9)
SP118	HONDA GX390 Gasoline w/Cyclone Air Filtration	1" (25.4)	18" (457)	6.5" (165)	Left & Right Side	4" x 2"	8" x 2"	270 (122.7)
SP15E16	BALDOR 5HP 230V 1Ø Electric Motor	1" (25.4)	16" (406)	5.5" (140)	Left Side only	4" x 2"	6" x 2"	235 (106.8)
SP2 Series - Push Model								
SP213H20A	HONDA GX390 Gasoline w/Cyclone Air Filtration	1" (25.4)	20" (508)	7.5" (191)	Left & Right Side	4" x 2"	8" x 2"	280 (127)
SP2 Series - Self Propelled Models								
SP2S13H20A	HONDA GX390 Gasoline w/Cyclone Air Filtration	1" (25.4)	20" (508)	7.5" (191)	Left & Right Side	4" x 2"	8" x 2"	325 (179)
SP2S20H	HONDA GX630 Gasoline / Dual Element Canister Filtration	1" (25.4)	20" (508)	7.5" (191)	Left & Right Side	4" x 2"	8" x 2"	395 (179)

Saw Accessories					
Model Saw	Description				Weight lbs. (kgs)
SP1WK	5 Gal. Water Tank Kit (for Model SP118 Only)				25 (11)
Saw Accessories - Diamond Blades					
Model	Blade Dimensions	Arbor Size	Grade	For Material(s)	Type
10PSA	10" x .125"	5/8"-DM	Premium	Green Concrete/Asphalt	DRY/WET
14PWBA	14" x .125	1"	Premium Plus	Green Concrete/Asphalt	DRY/WET
16PWBA	16" x .125	1"	Premium Plus	Green Concrete/Asphalt	DRY/WET
18PWBA	18" x .125	1"	Premium Plus	Green Concrete/Asphalt	DRY/WET
20PWBA	20" x .125	1"	Premium Plus	Green Concrete/Asphalt	DRY/WET
10PSG	10" x .125"	1"	Premium Plus	Cured Concrete	DRY/WET
14PWBC	14" x .125	1"	Premium Plus	Cured Concrete	DRY/WET
16PWBC	16" x .125	1"	Premium Plus	Cured Concrete	DRY/WET
18PWBC	18" x .125	1"	Premium Plus	Cured Concrete	DRY/WET
20PWBC	20" x .125	1"	Premium Plus	Cured Concrete	DRY/WET

* Engine power ratings are calculated by the individual engine manufacturer and the rating method may vary among engine manufacturers. Multiquip Inc. and its subsidiary companies makes no claim, representation or warranty as to the power rating of the engine on this equipment and disclaims any responsibility or liability of any kind whatsoever with respect to the accuracy of the engine power rating. Users are advised to consult the engine manufacturer's owners manual and its website for specific information regarding the engine power rating.

Your Multiquip dealer is:



Johnstone Brothers Equipment Corp.
905.796.0636



All features and specifications are subject to change without notice.