



STREET PRO SAWS

**Precision cutting performance
on Concrete and Asphalt**



The Street PRO 2 Series (SP2) represents engineered strength, design simplicity, and trusted performance. These saws excel at tough jobs that require true tracking, and fast sawing performance. The SP2 models are offered in 'push' or self-propelled design.

KEY FEATURES



5 GAL built-in water tank for dust suppression

Powerful HONDA GX390 gasoline engine with cyclonic air filtration system

Lifting bale provides engine protection and safe handling

Choose a push or hydrostatic transmission assisted self-propulsion system

Rugged tracking pointer for precise running guide

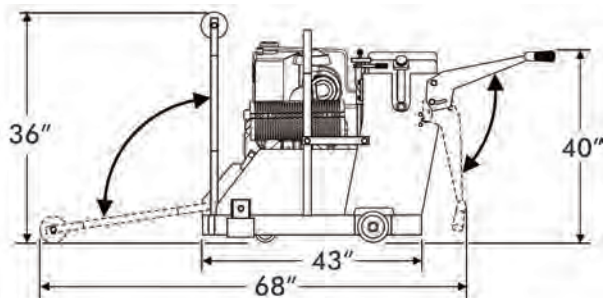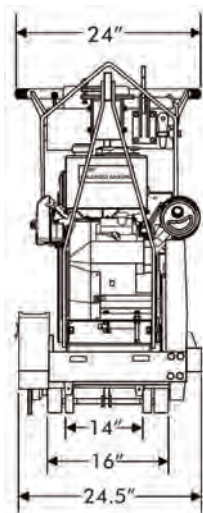

SP213H20A - SP2S13H20A

- For demolition sawing of cured concrete and asphalt.
- **Reinforced steel frame will not flex or bend with usage.**
- Adjustable handle bar for operator comfort.
- **Saw can easily adjust to 14", 16", 18", and 20".**
- Industrial blade shaft bearing assembly for long service life.
- **Trusted HONDA GX390 gasoline engine w/Cyclone Air Filter.**
- Rugged front and rear wheels supported by bearings, and robust pointer to provide accurate tracking.
- **All steel raise/lower system with positive depth lock.**
- Saws straight to the edge of walls and columns.
- **Left and Right hand sawing.**
- Depth of Cut: 8" with 20" blade.
- **Easy maintenance design.**



Specifications

Model	Power*	Arbor Size in. (mm)	Blade Capacity in. (mm)	Cutting Depth in. (mm)	Cutting Position	Front Wheels	Rear Wheels	Weight lbs. (kgs)
SP1 Series Saws - Push Models								
SP1G	HONDA GX200 Gasoline w/Cyclone Air Filtration	5/8" (15.9)	10" (254)	3 1/4" (83)	Center Mounted Blade	5" x 1.5"	5" x 1.5"	108 (48.9)
SP118	HONDA GX390 Gasoline w/Cyclone Air Filtration	1" (25.4)	18" (457)	6.5" (165)	Left & Right Side	4" x 2"	8" x 2"	270 (122.7)
SP15E16	BALDOR 5HP 230V 1Ø Electric Motor	1" (25.4)	16" (406)	5.5" (140)	Left Side only	4" x 2"	6" x 2"	235 (106.8)
SP2 Series - Push Model								
SP213H20A	HONDA GX390 Gasoline w/Cyclone Air Filtration	1" (25.4)	20" (508)	7.5" (191)	Left & Right Side	4" x 2"	8" x 2"	280 (127)
SP2 Series - Self Propelled Models								
SP2S13H20A	HONDA GX390 Gasoline w/Cyclone Air Filtration	1" (25.4)	20" (508)	7.5" (191)	Left & Right Side	4" x 2"	8" x 2"	325 (179)
SP2S20H	HONDA GX630 Gasoline / Dual Element Canister Filtration	1" (25.4)	20" (508)	7.5" (191)	Left & Right Side	4" x 2"	8" x 2"	395 (179)

Saw Accessories					
Model Saw	Description	Weight lbs. (kgs)			
SP1WK	5 Gal. Water Tank Kit (for Model SP118 Only)	25 (11)			
Saw Accessories - Diamond Blades					
Model	Blade Dimensions	Arbor Size	Grade	For Material(s)	Type
10PSA	10" x .125"	5/8"-DM	Premium	Green Concrete/Asphalt	DRY/WET
14PWBA	14" x .125	1"	Premium Plus	Green Concrete/Asphalt	DRY/WET
16PWBA	16" x .125	1"	Premium Plus	Green Concrete/Asphalt	DRY/WET
18PWBA	18" x .125	1"	Premium Plus	Green Concrete/Asphalt	DRY/WET
20PWBA	20" x .125	1"	Premium Plus	Green Concrete/Asphalt	DRY/WET
10PSG	10" x .125"	1"	Premium Plus	Cured Concrete	DRY/WET
14PWBC	14" x .125	1"	Premium Plus	Cured Concrete	DRY/WET
16PWBC	16" x .125	1"	Premium Plus	Cured Concrete	DRY/WET
18PWBC	18" x .125	1"	Premium Plus	Cured Concrete	DRY/WET
20PWBC	20" x .125	1"	Premium Plus	Cured Concrete	DRY/WET

* Engine power ratings are calculated by the individual engine manufacturer and the rating method may vary among engine manufacturers. Multiquip Inc. and its subsidiary companies makes no claim, representation or warranty as to the power rating of the engine on this equipment and disclaims any responsibility or liability of any kind whatsoever with respect to the accuracy of the engine power rating. Users are advised to consult the engine manufacturer's owners manual and its website for specific information regarding the engine power rating.

Your Multiquip dealer is:



Johnstone Brothers Equipment Corp.
905.796.0636

