



STREET PRO SAWS

Precision cutting performance
on Concrete and Asphalt



The **SP2S20H is a high performance road saw**. This model is designed for fast, accurate sawing applications with minimal service and maintenance requirements. The rugged all-steel construction, powerful HONDA engine, and hydrostatic drive system will provide years of trusted operations.

KEY FEATURES

5 GAL built-in water tank for dust suppression

Includes standard garden hose water plumbing system



Simple hydrostatic transmission assisted self-propulsion system



Powerful HONDA GX630 gasoline engine with electric start

20" blade guard, industrial blade shaft assembly with right/left sawing options

- For demolition sawing of cured concrete and asphalt.
- **Reinforced steel frame will not flex or bend with usage.**
- Adjustable handle bar for operator comfort.
- **Saw can easily adjust to 14", 16", 18", and 20" diameter blades.**
- Industrial blade shaft bearing assembly for long service life.
- **Saws straight to the edge of walls and columns.**
- Rugged front and rear wheels supported by
- **bearings, and robust pointer to provide accurate tracking.**
- All steel raise/lower system with positive depth lock.
- **Left and Right hand sawing.**
- Trusted HONDA GX390 gasoline engine w/Cyclone Air Filter.
- **Depth of Cut: 8" with 20" blade.**
- Easy maintenance design.

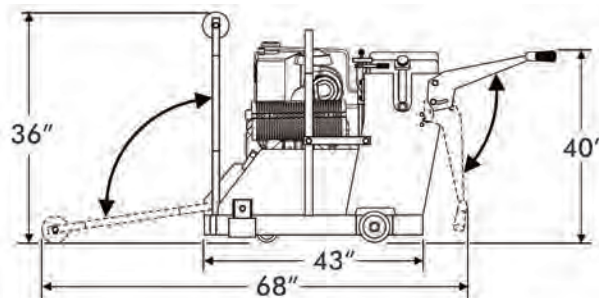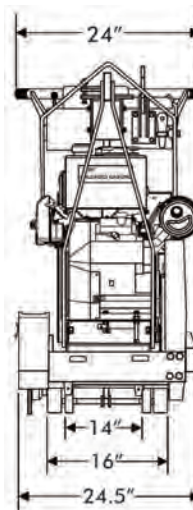

SP2520H



Specifications

Model	Power*	Arbor Size in. (mm)	Blade Capacity in. (mm)	Cutting Depth in. (mm)	Cutting Position	Front Wheels	Rear Wheels	Weight lbs. (kgs)
SP1 Series Saws - Push Models								
SP1G	HONDA GX200 Gasoline w/Cyclone Air Filtration	5/8" (15.9)	10" (254)	3 1/4" (83)	Center Mounted Blade	5" x 1.5"	5" x 1.5"	108 (48.9)
SP118	HONDA GX390 Gasoline w/Cyclone Air Filtration	1" (25.4)	18" (457)	6.5" (165)	Left & Right Side	4" x 2"	8" x 2"	270 (122.7)
SP15E16	BALDOR 5HP 230V 1Ø Electric Motor	1" (25.4)	16" (406)	5.5" (140)	Left Side only	4" x 2"	6" x 2"	235 (106.8)
SP2 Series - Push Model								
SP213H20A	HONDA GX390 Gasoline w/Cyclone Air Filtration	1" (25.4)	20" (508)	7.5" (191)	Left & Right Side	4" x 2"	8" x 2"	280 (127)
SP2 Series - Self Propelled Models								
SP2S13H20A	HONDA GX390 Gasoline w/Cyclone Air Filtration	1" (25.4)	20" (508)	7.5" (191)	Left & Right Side	4" x 2"	8" x 2"	325 (179)
SP2S20H	HONDA GX630 Gasoline / Dual Element Canister Filtration	1" (25.4)	20" (508)	7.5" (191)	Left & Right Side	4" x 2"	8" x 2"	395 (179)

Saw Accessories		
Model Saw	Description	Weight lbs. (kgs)
SP1WK	5 Gal. Water Tank Kit (for Model SP118 Only)	25 (11)

Saw Accessories - Diamond Blades					
Model	Blade Dimensions	Arbor Size	Grade	For Material(s)	Type
10PSA	10" x .125"	5/8"-DM	Premium	Green Concrete/Asphalt	DRY/WET
14PWBA	14" x .125	1"	Premium Plus	Green Concrete/Asphalt	DRY/WET
16PWBA	16" x .125	1"	Premium Plus	Green Concrete/Asphalt	DRY/WET
18PWBA	18" x .125	1"	Premium Plus	Green Concrete/Asphalt	DRY/WET
20PWBA	20" x .125	1"	Premium Plus	Green Concrete/Asphalt	DRY/WET
10PSG	10" x .125"	1"	Premium Plus	Cured Concrete	DRY/WET
14PWBC	14" x .125	1"	Premium Plus	Cured Concrete	DRY/WET
16PWBC	16" x .125	1"	Premium Plus	Cured Concrete	DRY/WET
18PWBC	18" x .125	1"	Premium Plus	Cured Concrete	DRY/WET
20PWBC	20" x .125	1"	Premium Plus	Cured Concrete	DRY/WET

* Engine power ratings are calculated by the individual engine manufacturer and the rating method may vary among engine manufacturers. Multiquip Inc. and its subsidiary companies makes no claim, representation or warranty as to the power rating of the engine on this equipment and disclaims any responsibility or liability of any kind whatsoever with respect to the accuracy of the engine power rating. Users are advised to consult the engine manufacturer's owners manual and its website for specific information regarding the engine power rating.

Your Multiquip dealer is:



Johnstone Brothers Equipment Corp.
905.796.0636

